

14/2 STRANDED RISER SPEAKER CABLE, UNSHIELDED

14 AWG 2 Stranded Conductors

Ratings
Approvals

CMR, CL3R, FT4
ETL Listed

Construction

Conductor
Conductor Count
Insulation
Insulation Colors
Lay Length
Shielding
Rip Cord
Jacket
Overall Diameter

14 AWG Oxygen-Free Bare Copper, 41-Stranded
2
PVC (0.011" nom.)
Red, Black
4.42" nom.
N/A
Yes
PVC (0.016" nom.)
0.224" nom.

Print Legend

ADIPRO P/N RN-501XXXX OXYGEN FREE
2C14 3180662(ETL)US CL3R ROHS C(ETL)US
CMR FT4 LOT # MMDDYY FOR AUDIO ONLY XXXXFT


Properties

Operating Voltage
DC Resistance
Capacitance
Temperature
Flame Rating

300 Volts max.
2.62Ohms/1000' at 20°C
24.6pF/ft. nom.
-20°C to 60°C
UL 1666 (Riser);
CSA C22.2 No. 2556 (FT4)

RoHS Compliant
Country of Origin

Yes
CHINA

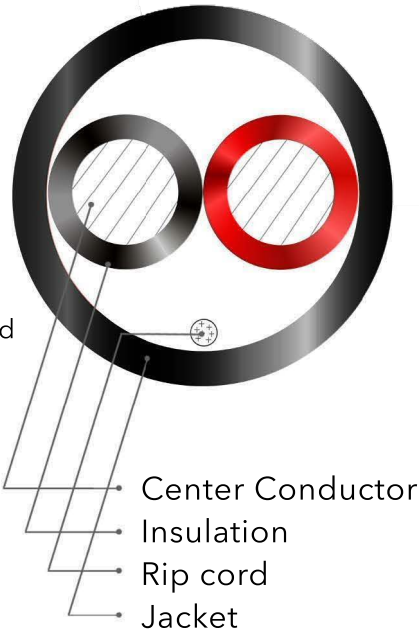

PART#	COLOR	LENGTH	BOX
RN-5014501	WHITE	500FT	EXPRESS BOX

